







C1 C2

GND VBUS




INTERFACE(FRONT VIEW)

|     |     |     |      |      |      |      |      |      |      |      |      |
|-----|-----|-----|------|------|------|------|------|------|------|------|------|
| A1  | A2  | A3  | A4   | A5   | A6   | A7   | A8   | A9   | A10  | A11  | A12  |
| GND | GND | GND | VBUS | VBUS | VBUS | VBUS | VBUS | VBUS | VBUS | VBUS | VBUS |
| B12 | B11 | B10 | B9   | B8   | B7   | B6   | B5   | B4   | B3   | B2   | B1   |

PIN ASSIGNMENT



|             |              |     |      |
|-------------|--------------|-----|------|
| PIN NO.     | A12&B12A4&B4 | GND | VBUS |
| SIGNAL NAME | GND          | GND | VBUS |
| PCB PAD NO. | C1           | C2  |      |



RECOMMENDED PCB LAYOUT(TOP VIEW)  
THICKNESS T=1.0mm  
DEFAULT TOLERANCE+/-0.05


NOTES:  
SPECIFICATION:

- CURRENT RATING: 3.0A MAX
- DIELECTRIC WITHSTAND VOLTAGE: 100VAC
- TEMPERATURE RANGE: -30 °C ~ 85 °C
- CONTACT RESISTANCE: 40 MILLIONHM MAX
- INSULATION RESISTANCE: 100 MEGOHMS MIN.
- INSERTION FORCE : 5N~20N
- UNMATING FORCE: 8N~20N
- DURABILITY:5000 CYCLES

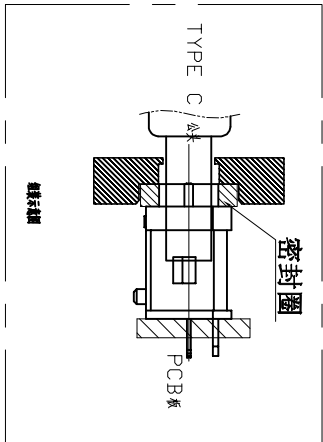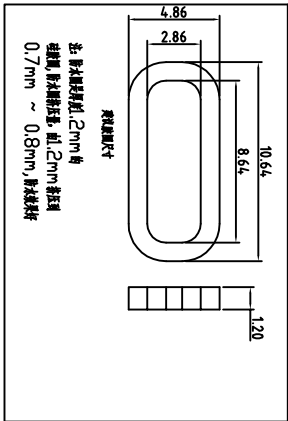

密封圈

TYPE C / A4



PCB

深圳市合众益华科技有限公司

PART NO. EZ-USBC-1125  
TITLE: 2PIN TYPEC

DWG NO.:

EZ-USBC-1125

APPD:

RADIM

CHKD:

MARK

DR:

wu.jy 2021/02/02

SCALE

SHEET

REV.

1/1

1/2

A1

Autodesk Inventor

2021/02/02

1/1

1/2

A1

Autodesk Inventor

2021/02/02

1/1

1/2

A1

Autodesk Inventor

2021/02/02

1/1

1/2

A1

Autodesk Inventor

2021/02/02

1/1

1/2

A1

Autodesk Inventor

2021/02/02

1/1

1/2

A1

Autodesk Inventor

2021/02/02

1/1

1/2

A1

Autodesk Inventor

2021/02/02

1/1

1/2

A1

Autodesk Inventor

2021/02/02

1/1

1/2

A1

Autodesk Inventor

2021/02/02

1/1

1/2

A1

Autodesk Inventor

2021/02/02

1/1

1/2

A1

Autodesk Inventor

2021/02/02

1/1

1/2

A1

Autodesk Inventor

2021/02/02

1/1

1/2

A1

Autodesk Inventor

2021/02/02

1/1

1/2

A1

Autodesk Inventor

2021/02/02

1/1

1/2

A1

Autodesk Inventor

2021/02/02

1/1

1/2

A1

Autodesk Inventor

2021/02/02

1/1

1/2

A1

Autodesk Inventor

2021/02/02

1/1

1/2

A1

Autodesk Inventor

2021/02/02

1/1

1/2

A1

Autodesk Inventor

2021/02/02

1/1

1/2

A1

Autodesk Inventor

2021/02/02

1/1

1/2

A1

Autodesk Inventor

2021/02/02

1/1

1/2

A1

Autodesk Inventor

2021/02/02

1/1

1/2

A1

Autodesk Inventor

2021/02/02

1/1

1/2

A1

Autodesk Inventor

2021/02/02

1/1

1/2

A1

Autodesk Inventor

2021/02/02

1/1

1/2

A1

Autodesk Inventor

2021/02/02

1/1

1/2

A1

Autodesk Inventor

2021/02/02

1/1

1/2

A1

Autodesk Inventor

2021/02/02

1/1

1/2

A1

Autodesk Inventor

2021/02/02

1/1

1/2

A1

Autodesk Inventor

2021/02/02

1/1

1/2

A1

Autodesk Inventor

2021/02/02

1/1

1/2

A1

Autodesk Inventor

2021/02/02

1/1

1/2

A1

Autodesk Inventor

2021/02/02

1/1

1/2

A1

Autodesk Inventor

2021/02/02

1/1

1/2

A1

Autodesk Inventor

2021/02/02

1/1

1/2

A1

Autodesk Inventor

2021/02/02

1/1

1/2

A1

Autodesk Inventor

2021/02/02

1/1

1/2

A1

Autodesk Inventor

2021/02/02

1/1

1/2

A1

Autodesk Inventor

2021/02/02

1/1

1/2

A1

Autodesk Inventor

2021/02/02

1/1

1/2

A1

Autodesk Inventor

2021/02/02

1/1

1/2

A1

Autodesk Inventor

2021/02/02

1/1

1/2

A1

Autodesk Inventor

2021/02/02

1/1

1/2

A1

Autodesk Inventor

2021/02/02

1/1

1/2

A1

Autodesk Inventor

2021/02/02

1/1

1/2

A1

Autodesk Inventor

2021/02/02

1/1

1/2

A1

Autodesk Inventor

2021/02/02

1/1

1/2

A1

Autodesk Inventor

2021/02/02

1/1

1/2

A1

Autodesk Inventor

2021/02/02

1/1

1/2

A1

Autodesk Inventor

2021/02/02

1/1

1/2

A1

Autodesk Inventor

2021/02/02

1/1

1/2

A1

Autodesk Inventor

2021/02/02

1/1

1/2

A1

Autodesk Inventor

2021/02/02

1/1

1/2

A1

Autodesk Inventor

2021/02/02

1/1

1/2

A1

Autodesk Inventor