

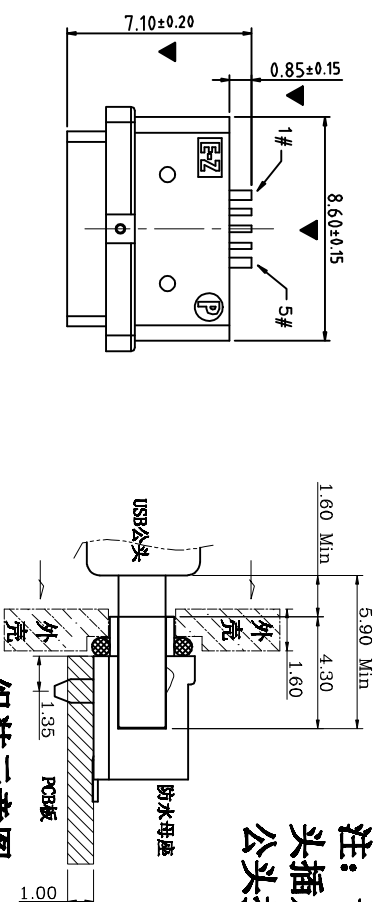


REV.	ECN. NO.	APPD.



注：设计时，请注意公头插入时的距离，防止公头插不到底。

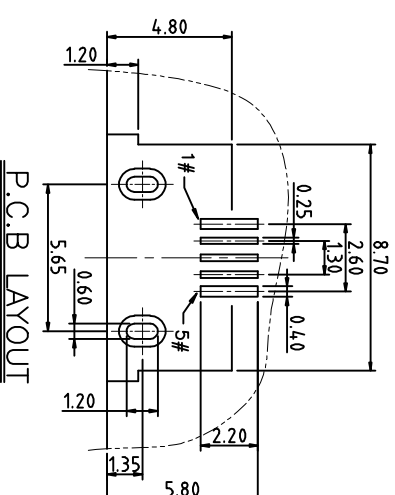

- SPECIFICATIONS:
1. ELECTRICAL CHARACTERISTICS:
 - 1.1. RATING: 3A(PIN1&5), 0.5A(PIN2&3&4);
 - 1.2. CONTACT RESISTANCE: 30 mΩ MAX (INITIAL);
 - 1.3. DIELECTRIC WITHSTANDING: 500V AC MIN.†
2. INSULATION RESISTANCE: 1000M Ω MIN.†
3. DURABILITY: 5,000 CYCLES MIN.†
4. INSERTION FORCE: 3.5kgf (35N) Max.;
5. EXTRACTION FORCE: 0.8kgf (8N) Min.†
6. WATER PROOFNESS: THIS PRODUCT IS BASED ON IPX6
7. PLUG INTERFACE DIMENSIONS CONFORM TO USB2.0 SPEC
8. PACKAGING: TAPE & REEL

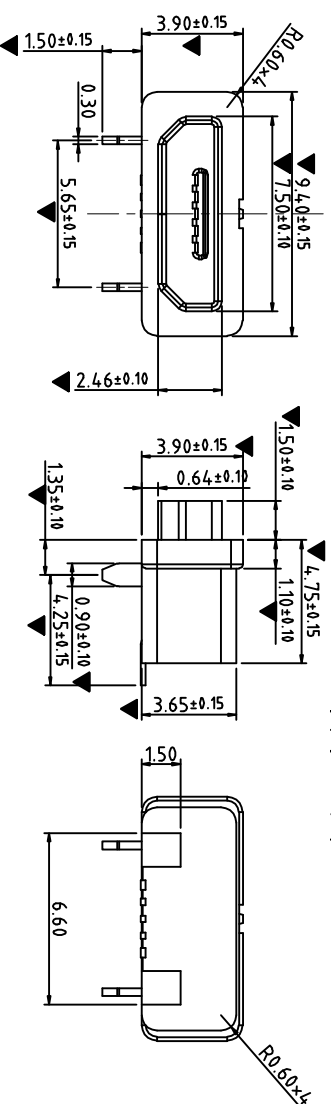

由 Autodesk 教育版产品制作

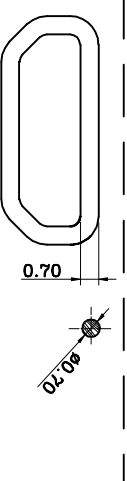

注：防水圈是圓形橫面，直徑為0.7mm的硅橡圈

Contact Number	Signal Name	Remarks
1#	VBUS	Power
2#	D-	Date-
3#	D+	Date+
4#	ID	Reserve or Ground
5#	GND	Ground

3	Shell	1	SUS304R-1/2H	Ni	PlatingT=0.30mm
2	Contact	5	Phosphor bronze C2680		
			Au/Ni	Plating	T=0.20mm
1	Housing	1	PA9T (G.F30%)		
ITEM	PART	NAME	FINISH		
Q' TY			NOTE		
X.	± 0.50	X. ° ± 2°	UNITS		
.X	± 0.30	.X.° ± 1°	mm		
.XX	± 0.10	.XX.° ± 0.5°	PART NO.		
.XXX	± 0.05		EZ-USB-1186-B3L		
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF E-ZONE ELECTRONIC TECHNOLOGY BE REPRODUCED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF E-ZONE ELECTRONIC TECHNOLOGY CO., LTD			TITLE:		
FINISH			Micro USB 5Pin SMT (B) Type		
Q' TY			(材料規格)		
APPRO: RALDOR			DWG NO.:		
CHECK: MARK			EZ-USB-1186-B3L		
DR: Steven,Roo 2016/08/08			SCALE		
			1/1		
			1/1		
			REV.		
			A1		

© Autodesk 教育版产品制作