


CAD GENERATED DRAWING. DON'T CHANGE BY HAND.






REV.	ECN. NO.	APPD.

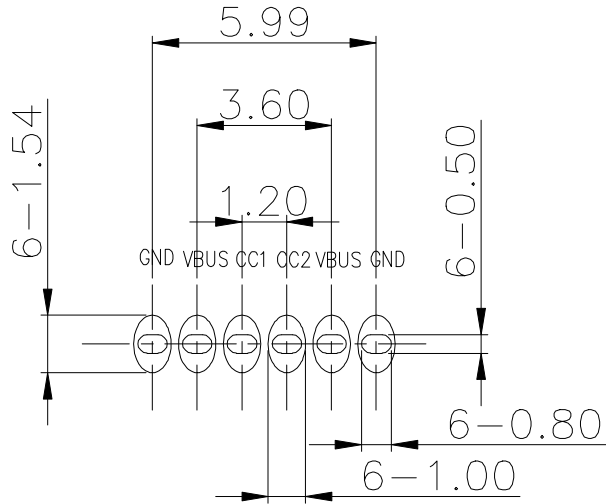


Recommended P.C.B. Layout
Unspecified tolerance: ± 0.05
(Top view)

RECOMMENDED PCB LAYOUT(TOP VIEW)

THICKNESS T=1.0mm
DEFAULT TOLERANCE+/-0.05

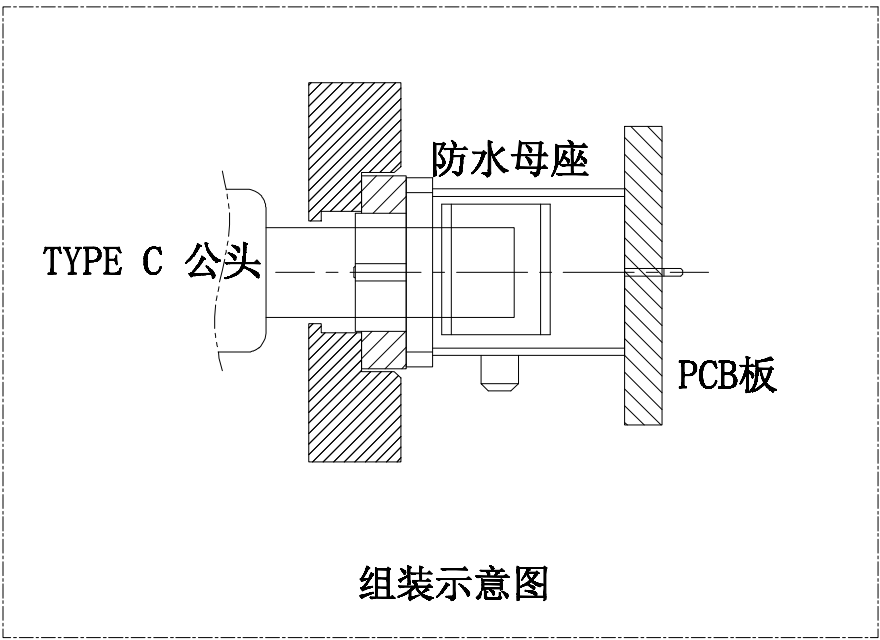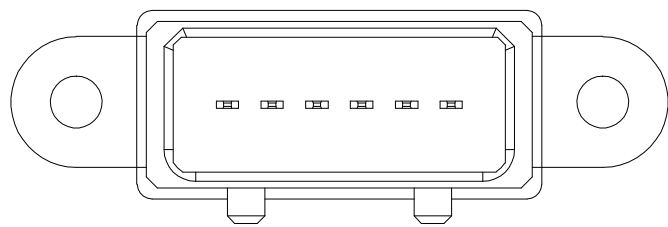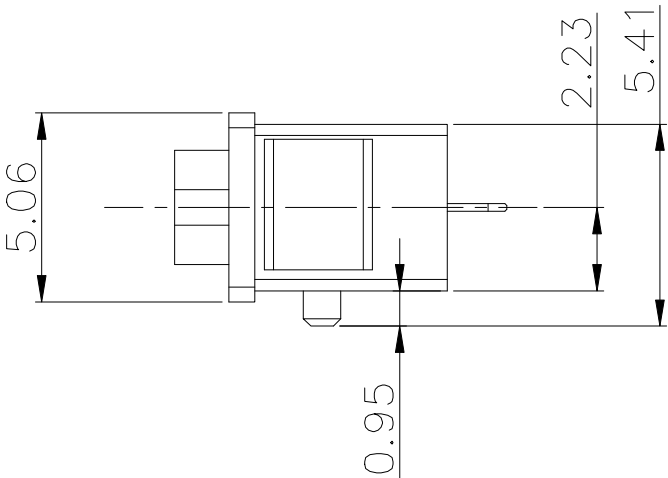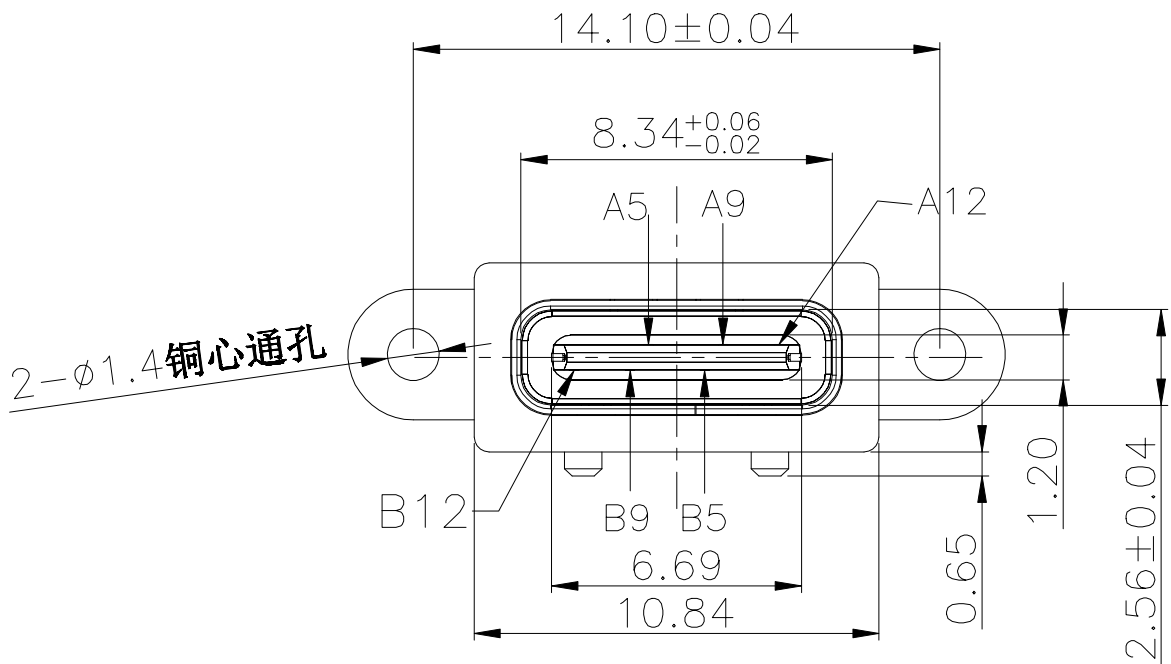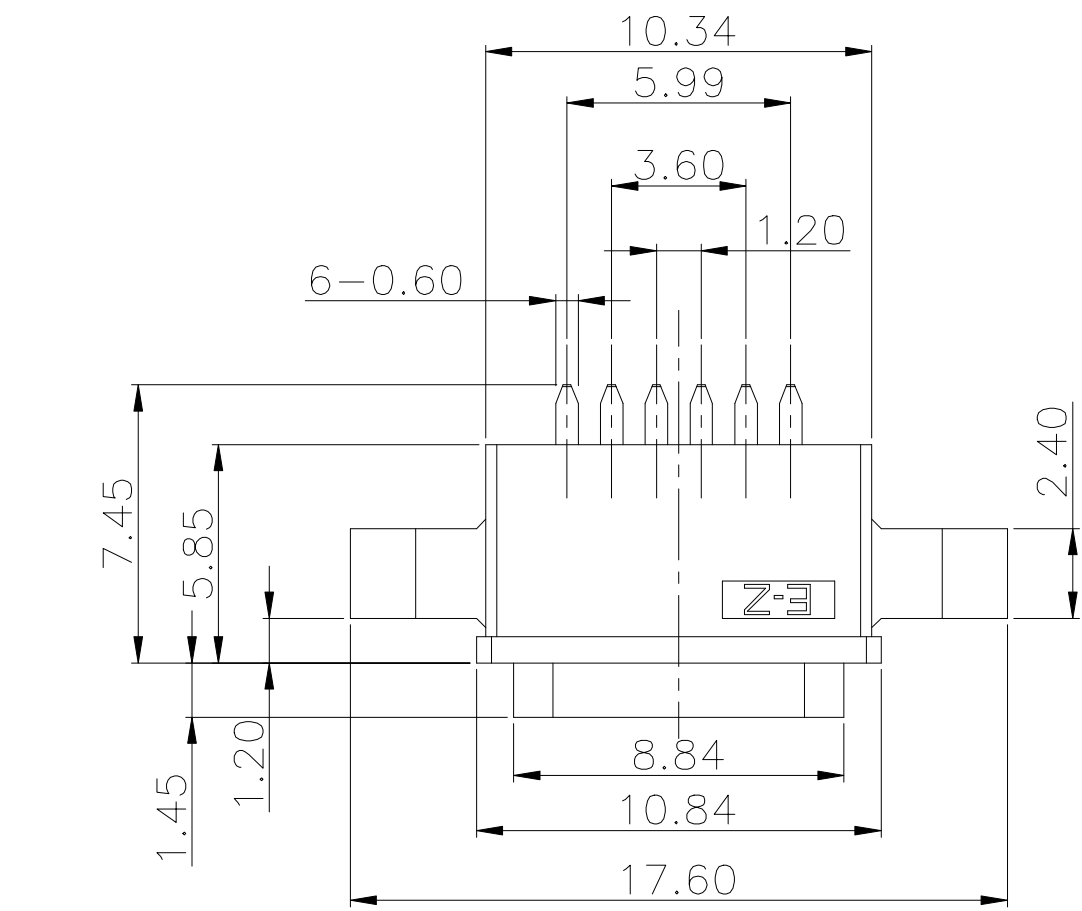

- NOTES:
SPECIFICATION:
1. CURRENT RATING: 3.0A MAX
 2. DIELECTRIC WITHSTAND VOLTAGE: 100VAC
 3. TEMPERATURE RANGE: -30 °C ~ 85 °C
 4. CONTACT RESISTANCE: 40 MILLIONHM MAX
 5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
 6. INSERTION FORCE : 5N~20N
 7. UNMATING FORCE: 8N~20N
 8. DURABILITY:5000 CYCLES

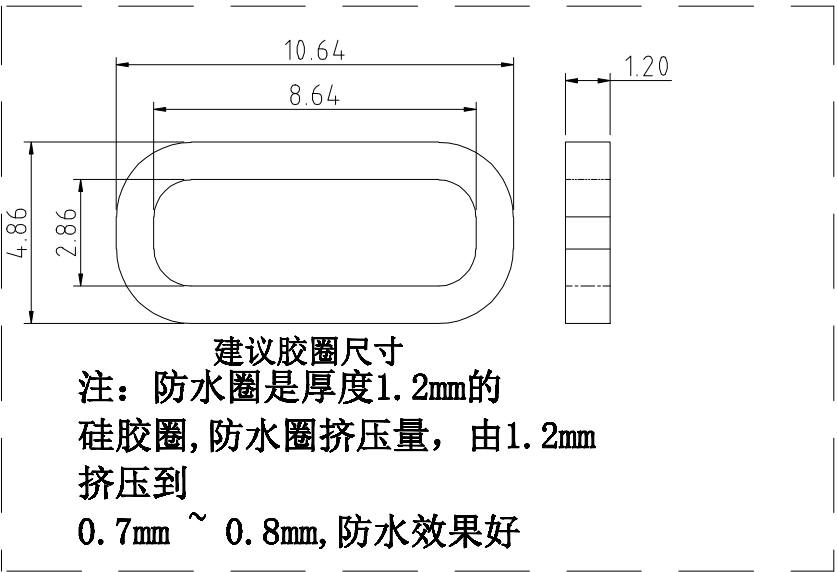


A5	CC1	B12	GND
A9	VBUS	B9	VBUS
A12	GND	B5	CC2
PIN	SIGNAL NAME	PIN	SIGNAL NAME

5	Screw	1	C3604 Ni Plating	Ni:40~120u";
4	Shell1	1	SUS304 Ni Plating T=0.25mm	Ni:40~120u";
3	M-D2	1	LCP(G.F30%)	
2	Contact	5	Phosphor bronze C5210R-EH Au/Ni Plating T=0.20mm	Ni:40~160u"; Au:CONTACT AREA:3u", OTHER AREA:G/F
1	Housing	1	PA9T (G.F30%)	
ITEM	PART NAME	Q' TY	FINISH	NOTE

X.	± 0.50	X. °	$\pm 2^{\circ}$	UNITS	mm
.X	± 0.30	.X °	$\pm 1^{\circ}$		
.XX	± 0.10	.XX °	$\pm 0.5^{\circ}$	MAT' L	
.XXX	± 0.05				
				FINISH	
				Q' TY	

深圳市合众益华科技有限公司

PART NO.		TITLE:			
EZ-USBC-1120A-6PIN		TYPEC 6Pin立式插件 带耳朵φ1.4铜心通孔			
APPD: RADOM		DWG NO. :			
		EZ-USBC-1120A-6PIN			
CHKD: MARK			SCALE	SHEET	REV.
DR: JOIN 2023/02/24			1/1	1/2	A1